




Park Your Dreams In Elegance

PARKING TILE

400X 400MM | 300X 300MM

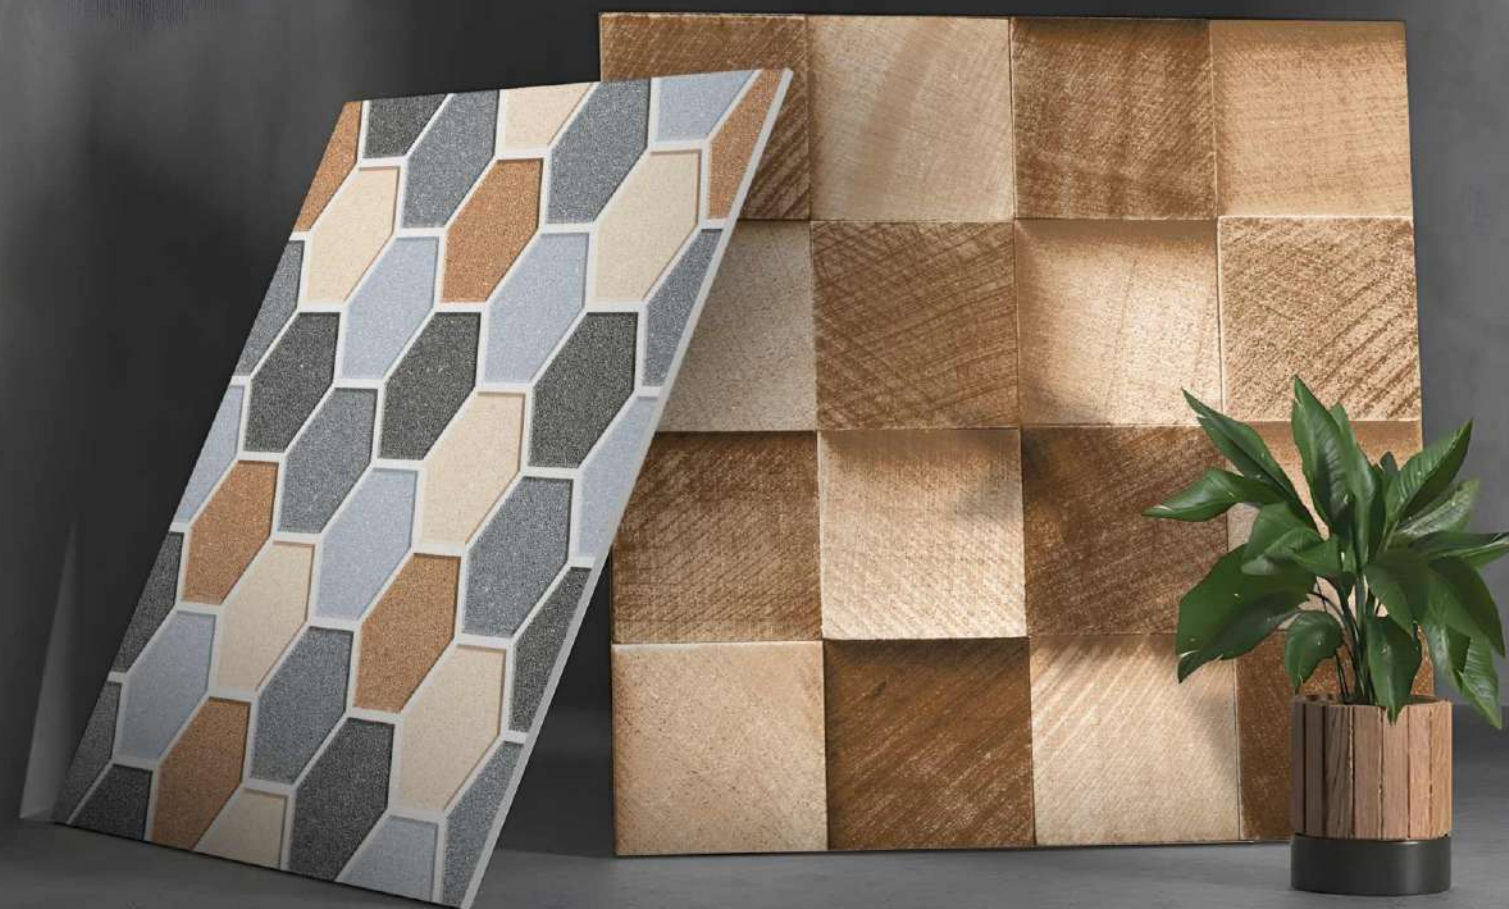

400x
400MM





Design - HSP4004 - HSP4005 Dark



MATT FINISH
400X400MM



PARKING



HSP4001 Decor



HSP4001



HSP4002



HSP4003



HSP4004




HSP4005 Dark



HSP4005 Light



HSP4006

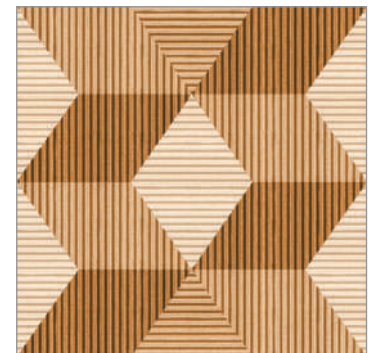

HSP4007



MATT FINISH
400X400MM




PARKING




HSP4008



HSP4009

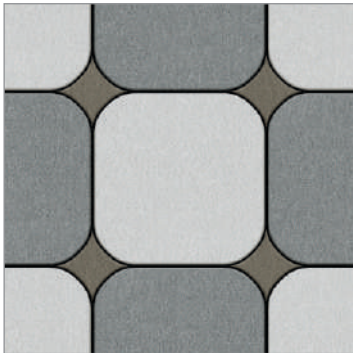

HSP4010

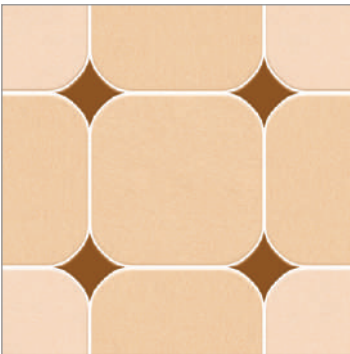


HSP4011



HSP4012



HSP4013

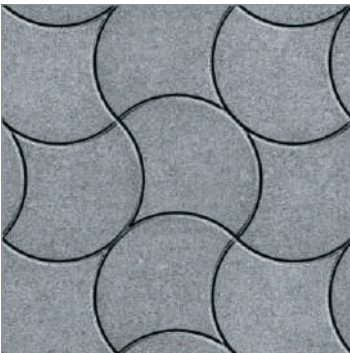

HSP4014



HSP4015



HSP4016

MATT FINISH
400X400MM



PARKING



HSP4017



HSP4018



HSP4019



HSP4020



HSP4021



HSP4022



HSP4023



HSP4024 Light



HSP4025



Design - HSP4029 - HSP4030

MATT FINISH
400X400MM



PARKING



HSP4026



HSP4027



HSP4028



HSP4029



HSP4030



HSP4031



HSP4032



HSP4033



WATER
REPELLENT



MAINTENANCE
FREE



FORMIDABLE
STRENGTH



DIRT
PROOF




PURE
HYGIENIC

MATT FINISH
400X400MM



PARKING

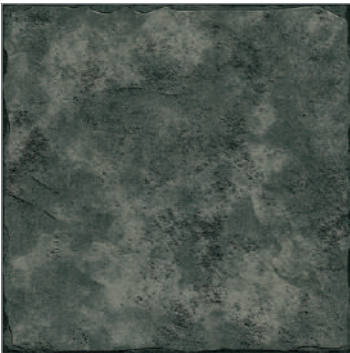

HSP4034 Dark




HSP4034 Decor




HSP4035



HSP4036

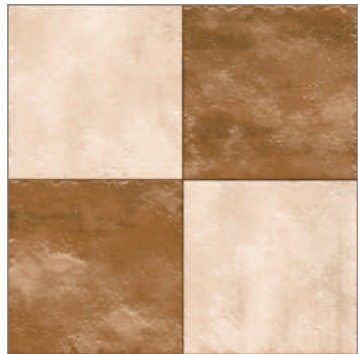


HSP4037

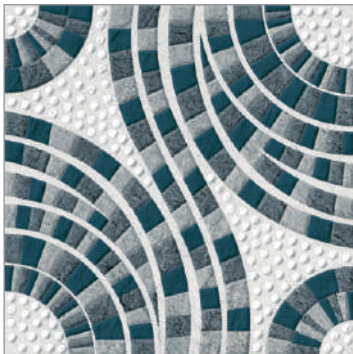

HSP4038



HSP4039

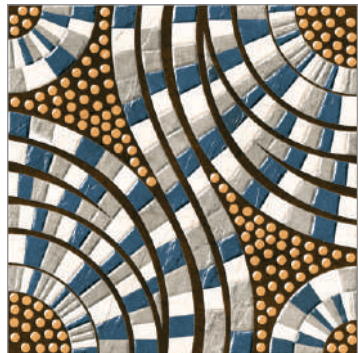

HSP4040



HSP4041

MATT FINISH
400X400MM



PARKING



HSP4042 Dark



HSP4042 Light



HSP4043 Dark



HSP4043 Decor




HSP4043 Light



HSP4044 Dark



HSP4044 Decor

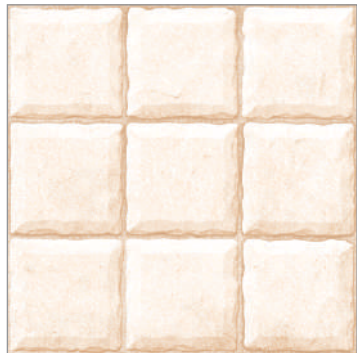

HSP4044 Light



HSP4025



Design - HSP4052 - 4053

MATT FINISH
400X400MM



PARKING



HSP4046




HSP4047



HSP4048



HSP4049

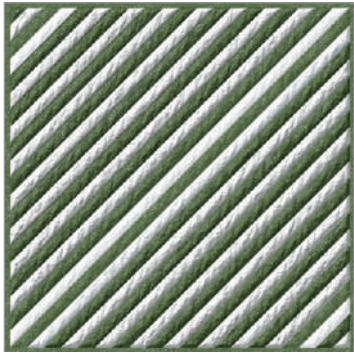

HSP4050



HSP4051



HSP4052



HSP4053



HSP4054

-  WATER REPELLENT
-  MAINTENANCE FREE
-  FORMIDABLE STRENGTH
-  DIRT PROOF
-  PURE HYGIENIC

MATT FINISH
400X400MM




PARKING



HSP4055



HSP4056

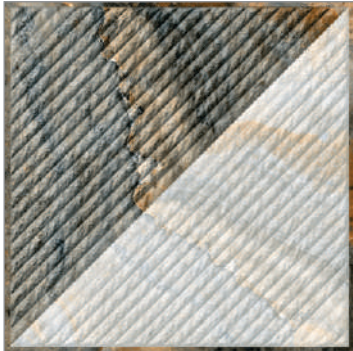


HSP4057



HSP4058




HSP4059

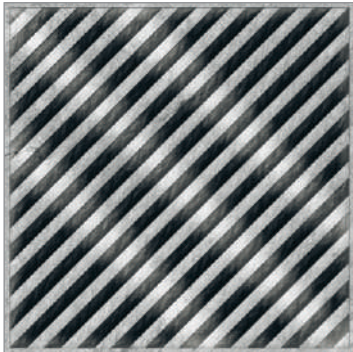

HSP4060



HSP4061

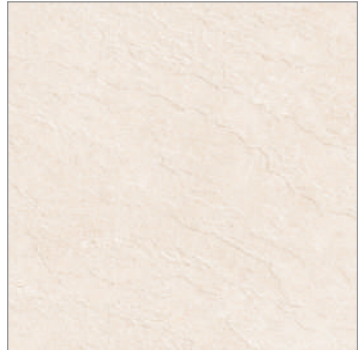

HSP4062




HSP4063

MATT FINISH
400X400MM



PARKING

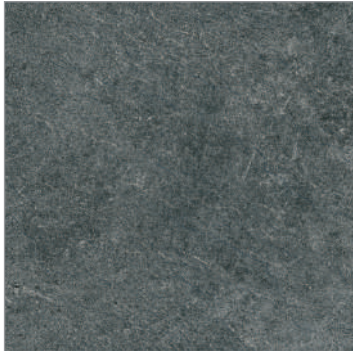

HSP4064




HSP4065



HSP4066



HSP4067

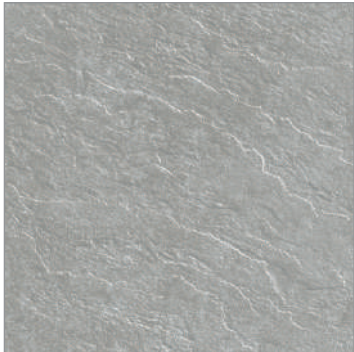


HSP4068



HSP4069



HSP4070

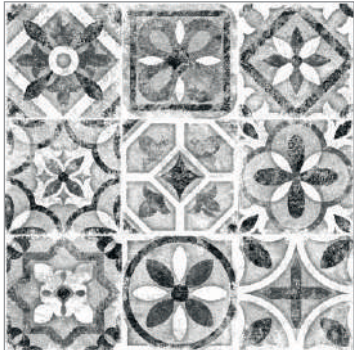

HSP4071



HSP4072



Design - HSP4074 - 4076




MATT FINISH
400X400MM




PARKING




HSP4073

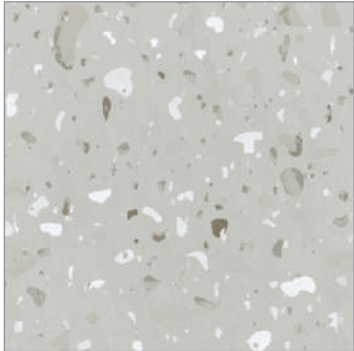


HSP4074

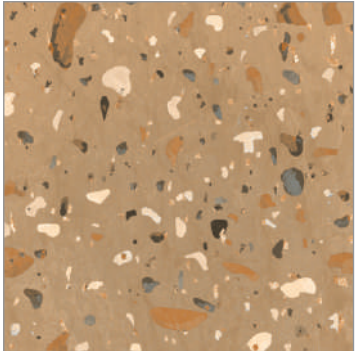


HSP4075

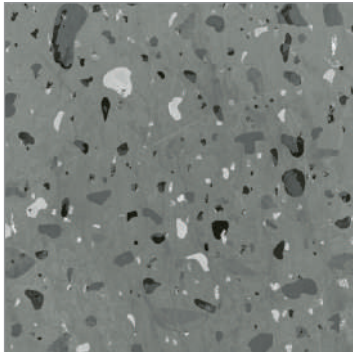

HSP4076

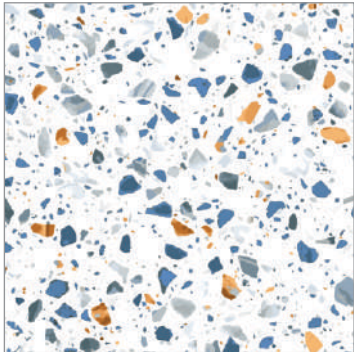


HSP4077

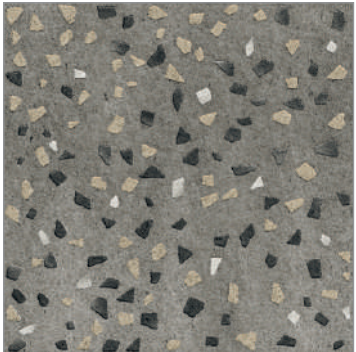


HSP4078



HSP4079

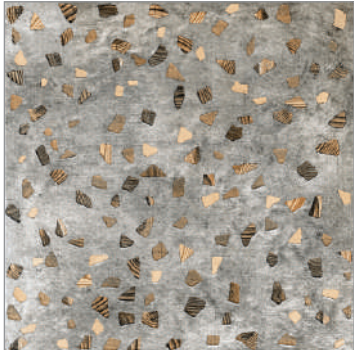

HSP4080

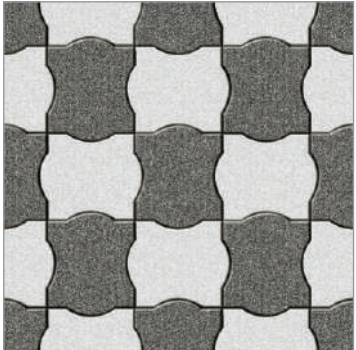

HSP4081

- WATER REPELLENT
- MAINTENANCE FREE
- FORMIDABLE STRENGTH
- DIRT PROOF
- PURE HYGIENIC




Design - HSP4083


MATT FINISH
400X400MM



PARKING

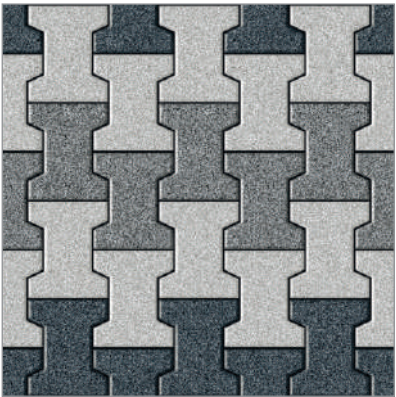

HSP4082

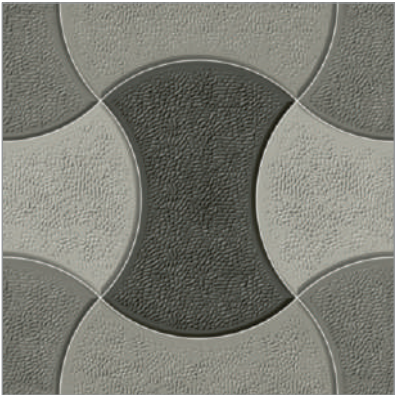

HSP4083



HSP4084

-  WATER REPELLENT
-  MAINTENANCE FREE
-  FORMIDABLE STRENGTH
-  DIRT PROOF
-  PURE HYGIENIC

300 X 300 MM





Design - HSP3003

MATT FINISH
300X300MM



PARKING



HSP3001



HSP3002



HSP3003




HSP3004



HSP3005



HSP3006



HSP3007



HSP3008



HSP3009



HSP3010



HSP3011



HSP3012



WATER
REPELLENT



MAINTENANCE
FREE



FORMIDABLE
STRENGTH



DIRT
PROOF



PURE
HYGIENIC


MATT FINISH
300X300MM



PARKING



HSP3013



HSP3014




HSP3015




HSP3016



HSP3017



HSP3018



HSP3019



HSP3020



HSP3021



HSP3022



HSP3023




HSP3024

MATT FINISH
300X300MM



PARKING




HSP3025



HSP3026



HSP3027



HSP3028




HSP3029



HSP3030




HSP3031



HSP3032



HSP3033



HSP3034



HSP3035



HSP3036




Design - HSP3042

MATT FINISH
300X300MM



PARKING




HSP3037



HSP3038



HSP3039



HSP3040



HSP3041



HSP3042




HSP3043



HSP3044



HSP3045



HSP3046



HSP3047



HSP3048



WATER
REPELLENT



MAINTENANCE
FREE



FORMIDABLE
STRENGTH



DIRT
PROOF



PURE
HYGIENIC




Design - HSP3053 - 3054

MATT FINISH
300X300MM



PARKING



HSP3049




HSP3050



HSP3051



HSP3052



HSP3053



HSP3054



HSP3055



HSP3056

- WATER REPELLENT
- MAINTENANCE FREE
- FORMIDABLE STRENGTH
- DIRT PROOF
- PURE HYGIENIC



Design - HSP3058 Step Riser

MATT FINISH
300X300MM



PARKING



HSP3057 Step



HSP3058 Step



HSP3059 Step



HSP3057 Riser



HSP3058 Riser




HSP3059 Riser



HSP3060 Step



HSP3061 Step




HSP3062 Step



HSP3060 Riser



HSP3061 Riser



HSP3062 Riser

- WATER REPELLENT
- MAINTENANCE FREE
- FORMIDABLE STRENGTH
- DIRT PROOF
- PURE HYGIENIC

TECHNICAL SPECIFICATION

PACKAGING DETAILS

Nominal Size (mm)	No. of tiles in carton	Avg. Wt. (kg) per carton	Coverage Area per carton	Thickness
400 x 400 (Digital)	5.0	17.5	0.80 sqmt / 08.61 sqft	11.0 mm
300 x 300 (Digital)	8.0	12.5	0.72 sqmt / 07.75 sqft	8.5 mm
300 x 300 (Non Digital)	8.0	13.0	0.72 sqmt / 07.75 sqft	8.5 mm

TECHNICAL SPECIFICATION FOR DIGITAL/NON-DIGITAL PARKING TILES - 300 x 300 MM

Characteristics	Requirement as per IS 15622:2017 3% < E ≤ 6% Group B IIa	Requirement as per ISO 13006: 2018 3% < E ≤ 6% Group B IIa	Test Method
A) Dimensions & surface quality			
i) Length & Width	± 0.10%	± 0.30%	IS 13630 Part 1/ISO-10545-2
ii) Thickness	± 5.0%	± 5.0%	
iii) Straightness of Side	± 0.10%	± 0.30%	
iv) Rectangularity	± 0.10%	± 0.30%	
v) Surface Flatness			
a) Centre Curvature (%) (Max Deviation)	± 0.50%	± 0.40%	
b) Edge Curvature (%) (Max Deviation)	± 0.50%	± 0.40%	
c) Corner Warpage (%) (Max Deviation)	± 0.50%	± 0.40%	
vi) Surface Quality	Min. 95% of tiles will be free from visible defects	Min. 95% of tiles will be free from visible defects	
B) Physical Properties			
i) Water Absorption	Avg. E ≤ 0.08 E ≤3.0	Av. ≤0.5 %, Individual 0.6% max	IS 13630 Part 2/ISO 10545-3
ii) Modulus of Rupture in [N/mm ²]	Av. 30, Individual 27 Min	Av. 35, Individual 32 Min	IS 13630 Part 6/ISO 10545-4
iii) Breaking Strength in N	1100 N	1300 Min.	
iv) Moisture Expansion in mm/m	0.02 Max	Test method available	IS 13630 Part 3/ISO-10545-10
v) Scratch Hardness of surface (Mohs)	Min 5	N.A.	IS 13630 Part 13
vi) Resistance to Abrasion of glazed tiles	Min II	Min. Class II	IS 13630 Part 11/ISO-10545-7
vii) Coefficient of linear thermal expansion from ambient temperature to 100°C	7 × 10 ⁻⁵ K ⁻¹ max	Test method available	IS 13630 Part 4 / ISO-10545-8
ix) Crazing Resistance	4 cycle @ 7.5bar min.	Not Applicable	IS 13630 Part 9 / ISO-10545-11
x) Impact Resistance as Co-efficient of Restitution (COR)	Min 0.55	Test method available	IS 13630 Part 5 / ISO-10545-14
xi) Thermal Shock Resistance	10 Cycle Min.	Required	IS 13630 Part 5 / ISO-10545-9
xiii) Frost Resistance	Required if agreed	Required	IS 13630 Part 10 / ISO-10545-12
C) Stain & Chemical Resistance (Un-glazed Tiles)			
i) Stain Resistance	Min Class -1	Min Class -3	IS 13630 Part 7 / ISO-10545-14
ii) Resistance to household chemicals	Required if agreed	Min Class B	IS 13630 Part 7 / ISO-10545-14
iii) Resistance to acids and alkalis (except hydrofluoric acid and its compounds)	Required if agreed	Declared Value	

NOTE

- The reproduction of tiles in this catalogue is restricted to four colour printing only and tiles are not in relative sizes, therefore customers are advised to see physical sample before placing the order.
- Technical specifications for Home Square Parking tiles are applicable only for premium quality tiles.
- Please inspect all tiles prior to installation, company will not entertain complaints, once the tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.

TECHNICAL SPECIFICATION

TECHNICAL SPECIFICATION FOR DIGITAL PARKING TILES - 400 x 400 MM

Characteristics	Requirement as per IS 15622:2017 3% < E ≤ 6% Group B IIa	Requirement as per ISO 13006: 2018 3% < E ≤ 6% Group B IIa	Test Method
A) Dimensions & surface quality			
i) Length & Width	± 0.10%	± 0.30%	IS 13630 Part 1/ISO-10545-2
ii) Thickness	± 5.0%	± 5.0%	
iii) Straightness of Side	± 0.10%	± 0.30%	
iv) Rectangularity	± 0.10%	± 0.30%	
v) Surface Flatness			
a) Centre Curvature (%) (Max Deviation)	± 0.50%	± 0.40%	
b) Edge Curvature (%) (Max Deviation)	± 0.50%	± 0.40%	
c) Corner Warpage (%) (Max Deviation)	± 0.50%	± 0.40%	
vi) Surface Quality	Min. 95% of tiles will be free from visible defects	Min. 95% of tiles will be free from visible defects	
B) Physical Properties			
i) Water Absorption	Avg. 3% < E ≤ 6%	Avg. 3% < E ≤ 6%	IS 13630 Part 2/ISO 10545-4
ii) Modulus of Rupture in [N/mm ²]	Av. 30, Individual 27 Min	Av. 30, Individual 27 Min	IS 13630 Part 6/ISO 10545-7
iii) Breaking Strength in N	1000 N	1000 Min.	
iv) Moisture Expansion in mm/m	0.02 Max	Test method available	IS 13630 Part 3/ISO-10545-5
v) Scratch Hardness of surface (Mohs)	Min 5	N.A.	IS 13630 Part 13
vi) Resistance to Abrasion of glazed tiles	Min III	Min. Class III	IS 13630 Part 11/ISO-10545-8
vii) Coefficient of linear thermal expansion from ambient temperature to 100°C	Max 9 × 10 ⁻⁶	Test method available	IS 13630 Part 4 / ISO-10545-9
ix) Crazing Resistance	2 cycle @ 7.5 bar min.	Not Applicable	IS 13630 Part 9 / ISO-10545-13
x) Impact Resistance as Co-efficient of Restitution (COR)	Min 0.70	Test method available	IS 13630 Part 5 / ISO-10545-3
xi) Thermal Shock Resistance	10 Cycle Min.	Test method available	IS 13630 Part 5 / ISO-10545-11
xiii) Frost Resistance	Required if agreed	Required	IS 13630 Part 10 / ISO-10545-10
C) Stain & Chemical Resistance (Un-glazed Tiles)			
i) Stain Resistance	Min Class 3	Min Class 3	IS 13630 Part 7 / ISO-10545-14
ii) Resistance to household chemicals	Required if agreed	Min Class B	IS 13630 Part 7 / ISO-10545-14
iii) Resistance to acids and alkalis (except hydrofluoric acid and its compounds)	Required if agreed	Declared Value	

NOTE

- The reproduction of tiles in this catalogue is restricted to four colour printing only and tiles are not in relative sizes, therefore customers are advised to see physical sample before placing the order.
- Technical specifications for Home Square Parking tiles are applicable only for premium quality tiles.
- Please inspect all tiles prior to installation, company will not entertain complaints, once the tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.